

SUPRA DAC-SL AUDIO


High end Analogue Stereo interconnect with RCA-plugs

Gauge: 1x3x0.24mm² / AWG 23

Rev.date: 2023-04-24

Customs tariff no: 8544429010

Country of origin: Sweden

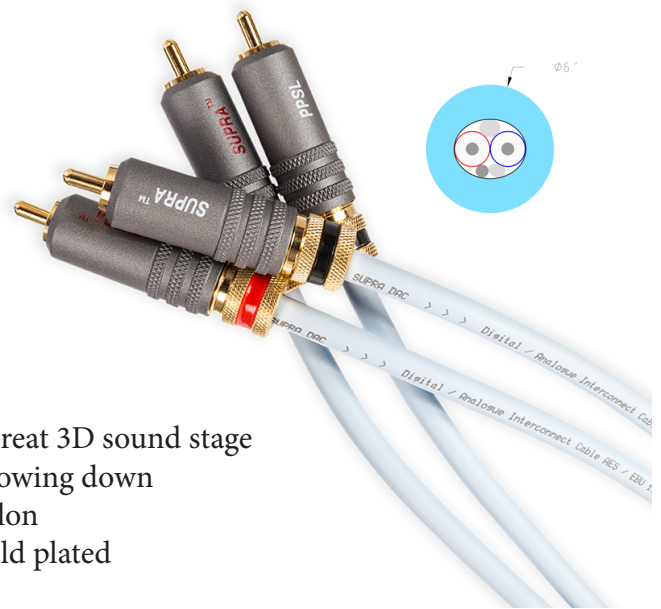

- An ultra fast, dynamic & neutral interconnect - with great 3D sound stage
- Low capacitance - signal pulse without flattening or slowing down
- Shielded with efficient and strong semi-conductive nylon
- Robust & lockable connectors - Noise immune and gold plated

DAC-SL 2RCA-2RCA Audio - A lightning-fast interconnect cable with no brakes

High end analogue interconnect with lockable RCA-plugs

Supra DAC is a really rapid response interconnect thanks to its extremely low capacitance. In accordance with our design philosophy, the inductance must be low for a loudspeaker cable whereas for a signal interconnect the capacitance must be kept to a minimum. Supra DAC is insulated with a special PE plastic which exhibits only 45 pF/m. Further it is foamed and encloses a lot of the cheapest, yet most efficient insulation; Air. More correctly insulation should be denominated dielectricum according to the physical laws, where there actually does not exist anything called insulation. Every substance, gas, fluid or solid, exhibits electrical properties, where the trick is to find and choose the most benign. Air is easily available, cheap and shows very good dielectrical properties compared to its price. When the PE is foamed, the residual amount of PE becomes like a sponge, hence further reducing its electrical influence on the fragile music signal. The enclosed air becomes the major dielectricum and results in an electrical locomotion without brakes; full dynamics, response time and 3D sound stage, you simply will not come any closer to the real live experience. Further it is shielded with our very efficient and strong semi-conductive nylon ribbon, keeping all malicious noise out. The velocity factor of SUPRA DAC is as high as 78% of the speed of light. With the PTFE/Teflon, often used among our competitors, it would have been only 71%.

Application examples are mid- to high-end analogue interconnect equipped with Supra RCA or XLR plugs. DAC-SL is equipped with 24K heavy-duty goldplated connector PPSL.

CONSTRUCTION

| | |
|--------------------|---|
| Cable: | SUPRA DAC |
| Jacket: | PVC GA78, round |
| Diameter: | 6.1mm |
| Colour: | Iceblue (other colours upon order) |
| Marking: | SUPRA DAC > Made in Sweden > Meter mark |
| Screen connection: | Semi-balanced, the screen is only conneted in the source end. |
| Plugs: | SUPRA PPSL, 2 RCA male > 2 RCA male |
| - Material: | 24K Gold plated Copper, chuck lock (turn the chassis to fasten & release) |
| - Colour: | Anthracite grey |
| - Locking: | Chuck lock at device & cable |
| Solder tin: | Almit SR34 Super |
| Signal direction: | Follow the arrows printed on the cable > source > receiver |
| Packing: | Blister 25 x 21.5 x 4.8cm |

Special lengths are made upon order.

! Plugs with chuck lock. Turn the grey housing to release or lock the plug to the female terminal.



| PRODUCT | Qty | Part.no | EAN-13 | E-no | Crt Weight |
|-----------------------------|-------|------------|---------------|---------|------------|
| DAC-SL AUDIO BLUE PAIR 75CM | 1PAIR | 1001900099 | 7330060003066 | 6243020 | 25 0,30 |
| DAC-SL AUDIO BLUE PAIR 1M | 1PAIR | 1001901295 | 7330060053450 | | 25 0,31 |
| DAC-SL AUDIO BLUE PAIR 2M | 1PAIR | 1001901188 | 7330060053467 | | 25 0,40 |