

SUPRA MB01/H SLIM 1PR LINE FRHF


Mic/Line Installation cable

Gauge: 1x3x0.24mm² / AWG 23


Rev.date: 2023-05-25

Customs tariff no: 8544499390

Country of origin: Sweden



- Excellent flame retardancy- Halogen free - low smoke
- Extremely tensile, reinforced with semi-conductive nylon screen
- Low capacitance - low microphony
- Low mechanical friction jacket, perfect for installation

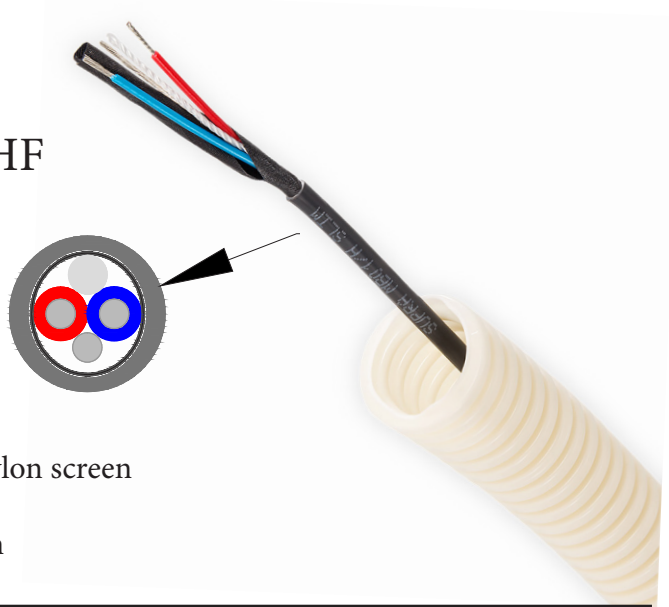

MB01/H Slim FRHF - Halogen free & flame retardant

a slim shielded two pole cable for installation, studio, pro market, suitable for balanced operation

A single channel analogue installation cable aimed for longer analogue transmissions in e.g. studios. Very good electrical and mechanical properties for a long service life. It can be used both as single-end as well as balanced, we recommend balanced operation at longer lengths (> 5 meters). Further its slim appearance makes it very easy to install in conduits and handle in general. It displays excellent flame retardant properties and fulfills the tough new EU demands for use in public places.

Supra Cables Flame Retardant for public and official premises. Jenving Technology is considered as a trustworthy and responsible partner for installations in public and official premises. We meet the latest regulation of flame retardancy and toxic emissions.

Standard

CPR; Construction Products Regulation; EN 50399:2011 and EN 60322-1-2:2004/A1:2015/A11:2016

CE marking; EN 50399 and EN60322

CONSTRUCTION

Conductors (x2):	Tin plated Cu-wire OFC 5N 19x0.127 mm
Cross section Area:	2x0,24mm ² / AWG 23
Insulation:	PE, Blue & Red. Twisted pair.
Screen:	Semi-conductive nylon screen, 100%.
Screen connection:	Tin plated OFC drain-wire 19x0.127mm
Jacket:	PE ECCOH 5943 FRHF, round
Jacket thickness:	1 mm
Diameter:	3.2 mm
Colour	Anthracite grey (other colours upon order)
Marking:	SUPRA MB01/H Slim > Made in Sweden > Meter mark
Weight.	15 kg/km
Packing:	Bobbin 400m (other lengths upon order)
Suitable plugs:	Supra RCA-3 & Swift XLR



**FLAME
RETARDANT**



Dca-s1,d1
0402-CPR-7P04047-1
EN50399:2011 &
EN60322-1-2:2004/A1
:2015/A11:2016
www.supracables.se



ELECTRICAL SPECIFICATION

Resistance:	72 ohm/km
Capacitance:	52 pF/m

PRODUCT	Qty	Part.no	EAN-13	E-no
MB01/H SLIM LINE FRHF GREY B400	400M	1001800588	7330060207273	4800043