

SUPRA PLY 2X3.4/S

Screened Loudspeaker cable



Gauge: 2x3.4mm² / AWG 12

Rev.date: 2022-08-30

Customs tariff no: 8544499390

Country of origin: Sweden

- Extremely low inductance
- Tin plated to minimize electron jumps between lead strands
- Dynamic sound - a multi test winner
- Screened - radiate & pick-up less noise

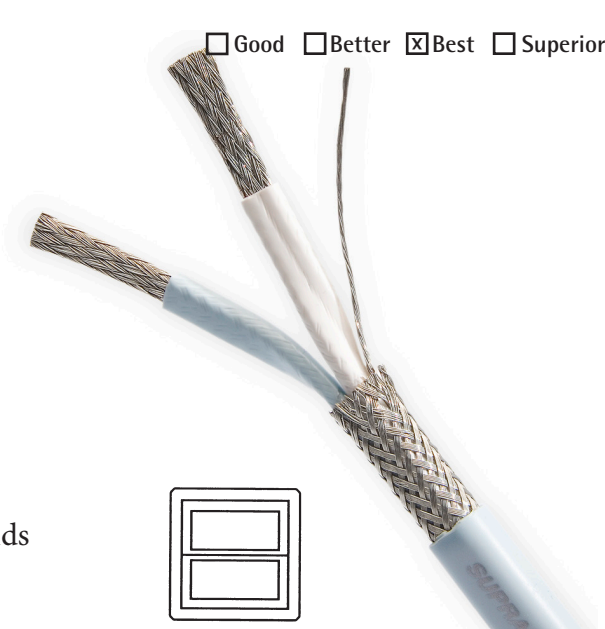

Ply 2x3.4/S (Shield)

Ultra-low inductance for maximum transient response & minimal RFI. Combines low induction and tin plating which provides for explosive dynamics. The shielded Ply 3.4/S provide even better performance when this model's added screen earth lead is connected to speaker minus terminal or to the earth terminal at the Amplifier chassis. Supra shielded cables both radiate and pick-up less noise compared to non-shielded. When installation environment gain from maximal noise immunity, Supra shielded speaker cables is the perfect choice. The result is immediately lowered noise floor and increased dynamics of the Hi-Fi system. Especially the so called micro dynamics; tiny, tiny notes, phrasing, the small differences how hard the drum is hit, in fact all the small discrepancies making the music come alive and not sounding artificial will appear and suddenly stand out from a pitch black background, free from noise, a truly remarkable discovery for most music lovers.

The drain-wire/screen should be connected to the earth screw/chassis of the amplifier/negative speaker terminal only, cut the screen at the speaker end.

CONSTRUCTION

Conductor (x2):	Tin plated OFC-braid 24x8x0.15 mm
Diameter:	4.3x1.7 mm
Cross section Area:	2x3.4mm ² / AWG 12
Insulation:	Blue + / White -
Insulation thickness:	0.7 mm
Screen:	Tin plated OFC-wire 24x5x0.15 mm
Screen coverage:	98%
Screen connection:	Tin plated OFC drain wire 19x0.127mm
Jacket:	PVC GA78, square model
Jacket thickness:	0.8 mm
External size:	7.3x7.3 mm
Colour:	Iceblue (other colours upon order)
Marking:	SUPRA PLY 2x3.4/s + Made in Sweden + Meter mark
Weight:	156 kg/km
Packing:	Bobbin 100m (other lengths upon order)

Earth/Screen connection.

The earth conductor should be connected in the source end only (amplifier side) to:

1. Earth terminal at the amp (if available)
2. Connect to any of the amp chassis screws.
3. Negative speaker out terminal

ELECTRICAL SPECIFICATION

Resistance:	5.1 ohm/km
Inductance:	0.20 uH/m
Rated voltage:	100V



PRODUCT	Qty	Part.no	EAN-13	E-no	Carton
PLY 2X3.4/S BLUE B100	100M	1000000214	7330060000188	4866493	
PLY 2X3.4/S BLUE 5M	1PC	1000000529	7330060201950		13pcs
PLY 2X3.4/S BLUE 10M	1PC	1000000586	7330060202643		13pcs