

LINC 2X4.0

Screened Loudspeaker cable



Gauge: 2x4.0mm² / AWG 11

Rev.date: 2026-04-09

Customs tariff no: 8544499390

Country of origin: Sweden

- Screened - reduced noise pickup
- Low inductance
- Double insulated, suitable for 100 V systems
- Tin-plated conductors for enhanced corrosion resistance

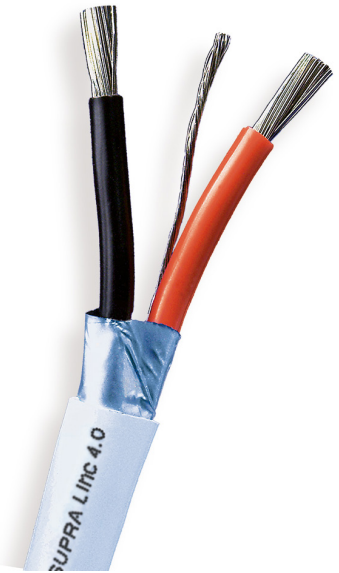

LINC 2x4.0 - Screened

Supra Linc is an evolution of the Supra Rondo two-part round cable. Its already low magnetic field levels have been further reduced through short-pitch twinning. In addition, Supra Linc is equipped with a shield that effectively blocks electric fields, particularly preventing the pickup of unwanted RFI (radio frequency interference), whether analogue or digital.

Its low inductance ensures excellent transient response and signal transparency. The name Linc stands for Low Interaction Concept. The cable is flexible and easy to install, making it suitable for permanent in-wall installations, including conduit applications.

The result is an immediately lower noise floor and increased system dynamics. This is especially noticeable in micro-dynamics—the subtle details in music such as delicate phrasing, fine gradations in attack, and the smallest variations in how notes are played. These nuances, which bring music to life and prevent it from sounding artificial, emerge clearly against a silent, noise-free background. For many listeners, this represents a remarkable improvement.

CONSTRUCTION

Conductor (x2):	Tin plated OFC-wire 511x0.10 mm
Diameter:	2.7 mm
Cross section Area:	2x4.0mm ² / AWG 11
Insulation:	Red + & Black -
Insulation thickness:	0.7 mm
Screen:	Alu/PET foil, 100%
Screen connection:	Tin plated OFC drain wire 19x0.127mm
Jacket:	PVC GA78, round
Jacket thickness:	1.5 mm
Diameter:	8.7 mm
Colour:	Ice blue (other colours upon request)
Märkning:	SUPRA LINC 2x4.0 + Made in Sweden + Meter mark
Weight:	135 kg/km
Packaging:	Bobbin 100m and 300m (other lengths upon request)

Drain Wire / Shield (Earth) Connection
The earth conductor should be connected in the source end only (amplifier side) to:

1. Earth terminal at the amp (if available)
2. Connect to any of the amp chassis screws.
3. Negative speaker out terminal

ELECTRICAL SPECIFICATIONS

Resistance:	4.3 ohm/km
Inductance:	0.45 uH/m
Rated voltage:	100V



PRODUCT	Qty	Part.no	EAN-13	E-no
LINC 2X4.0 BLUE B100	100M	1000000164	7330060000164	4866573
LINC 2X4.0 BLUE B300	300M	1000001220		