

SUPRA PHONO AUDIO 2PRS

Phono Stereo Interconnect with earth connection



Gauge: 2x3x0.24mm² / AWG 23

Rev.date: 2026-04-20

Customs tariff no: 8544499390

Country of origin: Sweden

- Efficient shielding provides maximum signal integrity
- Suppress RFI interference
- Unbeatable price-performance ratio
- Earth Link efficiently cancels any earth potential hum

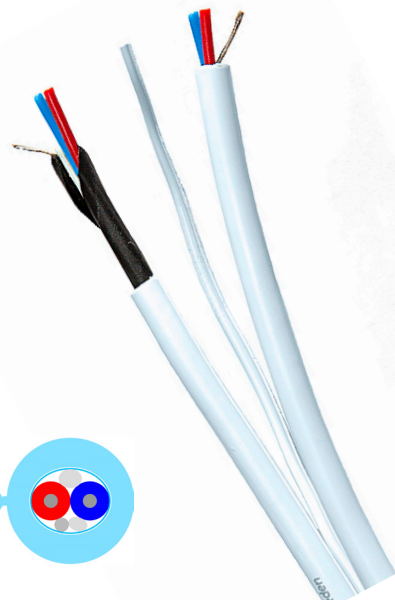

Phono Audio - Phono Stereo Interconnect with earth connection

Supra Phono cable is a dual channel connection between a turntable, step-up transformer or/and a RIAA phono stage or a receiver with a dedicated phono input, including the Earth Link required for most turntable connections. Supra Phono's low capacitance and thanks to the new carbon/nylon shield, its noise interference immunity, make a dead silent cable suitable also for low output moving coil cartridges. Further the low capacitance allow for best transient response, without damping or slowing down the musical beat. Great dynamics and 3D sound stage experience. Efficient shielding makes a dead silent cable provides maximum signal integrity also for moving coil cartridges & Suppress RFI interference that are highly malignant for the noise floor.

CONSTRUCTION

Cunductors (x4):	Tin plated Cu-wire OFC 19x0.127 mm
Cross section Area:	2x0,24mm ² / AWG 23
Insulation:	Pair 1: PE red & blue / Pair 2: PE red & black. Twisted.
Screen:	Mechanically durable semi-conductive Carbon-filled Nylon screen, 100%
Screen connection:	2 x Tin plated OFC drain wires 19x0.127mm
Pairs:	2 twisted pairs, PE insulation in different colours for easy identification.
Extra ground connect:	Separate Ground Link. Tin plated OFC wire 19x0.127 mm
Jacket:	PVC GA78, 8-model
Jacket thickness:	2 mm
Diameter:	2 x 5.5mm
Colour:	Ice blue (other colours upon request)
Marking:	SUPRA Phono > Made in Sweden > Meter mark
Weight:	75 kg/km
Packaging:	Bobbin 100m (other lengths upon order)
Suitable plugs:	Supra RCA-6, RCA-6SC och Swift XLR (Earth link, Spade B1553)

ELECTRICAL SPECIFICATION

Resistance:	72 ohm/km
Capacitance:	52 pF/m
Karastiristisk impedans:	90 Ohm
Velocity factor:	0,66x C (speed of light)



PRODUCT	Qty	Part.no	EAN-13	E-no
PHONO 2-PAIR AUDIO BLUE B100	100M	1001800554	7330060206252	