

SUPRA SWORD-IXLR AUDIO

High-End Interconnect with Gold plated XLR plugs


Gauge: 1.5mm² / AWG 15

Rev. date: 2026-05-26

Customs tariff no: 8544429010

Country or origin: Sweden

- Transparent - No signal deformation
- Great frequency response and no phase shifting.
- Bifilar wound Litz conductors
- Heavy-duty XLR plugs, 24K Gold plated pins




Sword-IXLR Interconnect - The High End

The cable works as a perfect signal carrier without the side effects of the traditionally designed cables, which display severe problems with frequency response and phase shifting. Sword maintain the signal integrity with almost immeasurable deformation due to our freedom and ability to master the electro-physical layout, instead of compensating with mystery boxes and batteries. It is hard to beat the Sword series, regardless of price. What does it sound like? The best description is nothing - Supra Sword does not sound at all. Supra Sword passes the complex music signal of an infinite number of sine waves and an infinite number of levels without causing any deformations between the source output to the receiver input. No part of the music suffer delay (phase shift), why the timing of each tone are exactly the same before and after. If every other hifi device in the system is capable of equally correct timing and preservation of the recordings' sound, the speaker setup and listening room acoustics is optimal, the result is such alive you can truly imagine being in the studio among the musicians. The Sword's lack of electrical properties ensures complete transparency. It is sometimes harder to distinguish a transparent cable from a cable with an apparent "sound lift" that emphasize certain notes.



CONSTRUCTION

- Kabel: [Sword-I](#)
- Conductors (x2): 2x6x0.40 (Enameled) spun around PE/PP-filler
- Area: 2x1.5mm² / AWG 15
- Isolation: PP/PE mix, D=3mm
- Parts: Twisted
- Shield: Common Alu/Pet foli, 100%
- Jacket: PVC GA74 Crystal, round, D=8mm
- Colour: Transparent Iceblue
- Connectors: [Swift XLR](#), 3-pin balanced connection
- Type: Stereo, 2 XLR Female > 2 XLR Male
 - Material: Pins 24K gold plated OFC, Right = red, left = black
 - Wire connection: Soldering. Solder tin Almit 34 Super
 - Jack connection: Quick lock
- Signal direction: Female > Source > to > Male > Receiver
- Packaging: Wooden box 22x22x4 cm

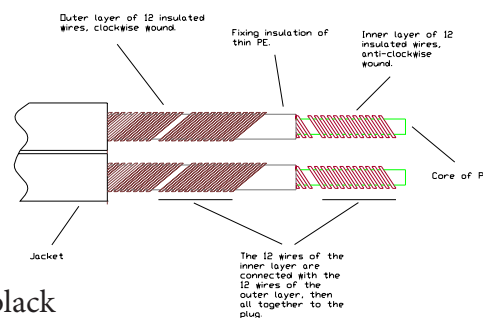

Special length are made upon request.

PRODUCT	Qty	Part.no	EAN-13	Carton	Weight (kg)
SWORD-IXLR AUDIO 0.8M 1PAIR		1001905346	7330060201486	1	0.75
SWORD-IXLR AUDIO 1M 1PAIR		1001905387	7330060201448	1	0.78
SWORD-IXLR AUDIO 1.5M 1PAIR		1001909140	7330060208447	1	0.95
SWORD-IXLR AUDIO 2M 1PAIR		1001909173	7330060208478	1	0.95