

Product Safety Sheet for Supra Sword Jumper Cable


Product Name: Supra SWORD JUMPER 2X28CM

Manufacturer Information:

Name: Supra Cables / Jenving Technology AB

Address: Bastebacka 112-113, 45991 Ljungskile, Sweden

Contact: Jörgen Wahlsberg, +46-522-698990, www.supracables.se

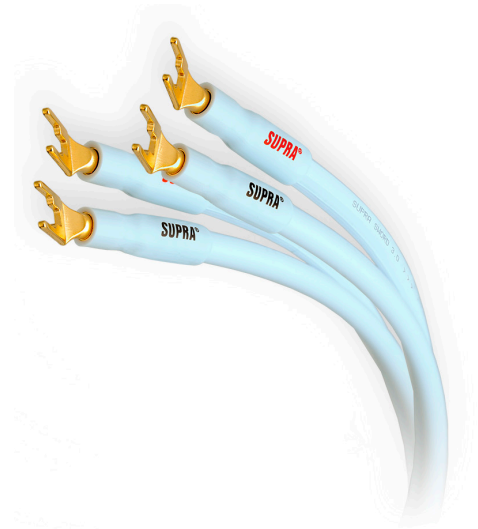

1. Product Description

Product Type: High-performance screened loudspeaker jumper cable set for Hi-Fi and high-end audio systems, designed for transparent signal transfer between bi-wire compatible loudspeaker terminals. Model: SUPRA Sword Jumper 2x28 cm.

Applications: High-fidelity speaker-level signal bridging in stereo and home audio systems. Optimised for demanding Hi-Fi installations where low inductance, phase stability, and minimal signal loss are essential for accurate and dynamic sound reproduction. Ideal for replacing standard metal jumper plates on bi-wire loudspeakers with a high-performance cable solution.

2. Safety Standards and Compliance

Relevant Directives and Standards:

- Low Voltage Directive (LVD) 2014/35/EU
- RoHS Directive 2011/65/EU
- General Product Safety Regulation (GPSR) 2023/988
- CE Marking: This product conforms to all applicable EU safety, health, and environmental protection standards and bears the CE marking.

3. Risk Assessment and Mitigation

Potential Hazards:

- Electrical Shock: Risk if the cables are damaged or improperly installed.
- Fire Hazard: Reduced compared to standard cables, but proper installation is required to maintain flame-retardant properties.
- Physical Damage: Risk of damage to the cables if subjected to excessive bending, crushing, or abrasion.

Mitigation Measures:

- Manufactured with tin-plated oxygen-free copper (OFC) for high conductivity and corrosion resistance
- Clearly marked for correct usage and cross-sectional area.

4. Technical Specifications

- Cable Type: SUPRA Sword Jumper 2x28 cm
- Length: 2 x 28 cm
- Connector System: Permanently fixed, high-pressure crimped solid copper spade connectors (non-interchangeable), designed for maximum mechanical stability and long-term signal integrity.
- Conductor Material: High-purity oxygen-free copper (OFC), individually lacquer-insulated litz strands.
- Purity: High-grade OFC for maximum conductivity and long-term signal integrity.
- Design: Bifilar-wound litz geometry with low-inductance signal path for transparent signal transfer.
- Cross-section: 2 x 3.0 mm² / AWG 12
- Insulation: Individually lacquer-insulated strands with durable PVC outer jacket.

- Shielding: Screened construction for reduced electromagnetic and RFI interference.
- Termination: High-pressure crimped airtight connections between conductor and connector body for optimal conductivity and mechanical strength.
- Voltage rating: Speaker-level audio use
- Temperature range: -30°C to +70°C

5. Labeling and Traceability

Each product is labeled with:

- Product Name
- Serial/Batch Number
- Manufacturer Contact Information
- Meter Markings for length measurement
- CE Marking

6. Instructions for Safe Use

- Ensure the cable is suitable for the intended audio application and power requirements.
- Install according to local building and fire safety codes, particularly in public or commercial spaces.
- Avoid exceeding the cable's current-carrying capacity to prevent overheating.
- Inspect for physical damage before installation; do not use if the insulation is compromised.
- For in-wall or conduit installations, verify flame-retardant performance requirements.

7. Incident Management and Reporting

Post-Market Surveillance:

- Supra Cables monitors product performance and user feedback to identify potential safety issues.

Incident Reporting:

- In case of a safety issue, customers are encouraged to contact Supra Cables immediately.
- Incidents will be reported to relevant authorities via the EU Safety Business Gateway as required by GPSR.

8. Declaration of Conformity

Supra Cables declares that this product complies with the following directives and standards:

- CE, RoHS, REACH & CPR verified by Rise

9. Disposal Instructions

- Dispose of this product in accordance with local electronic waste disposal regulations.
- Do not discard with general household waste.

Signed by: Jörgen Wahlsberg

Date: 05/26/2026

