

## Product Safety Sheet for Belgian & French Mains Block with Filters & Surge Protection

Product Name: BE/FR Mains Block MDXX-BE/SP

Manufacturer Information:

Name: Supra Cables / Jenving Technology AB

Address: Bastebacka 112-113, 45991 Ljungskile, Sweden

Contact: Jörgen Wahlsberg, +46-522-698990, [www.supracables.se](http://www.supracables.se)



### 1. Product Description

Product Type: Power mains block designed for 110-250V systems in Belgian & French markets, featuring integrated Non-Intrusive Filtering (NIF) and surge protection.

Applications: Intended for use in residential and commercial environments to reduce electromagnetic interference (EMI), protect against power surges, and improve power quality for connected devices.

### 2. Safety Standards and Compliance

Relevant Directives and Standards:

- Low Voltage Directive (LVD) 2014/35/EU
- Electromagnetic Compatibility Directive (EMC) 2014/30/EU
- RoHS Directive 2011/65/EU
- General Product Safety Regulation (GPSR) 2023/988

CE Marking: This product conforms to all applicable EU safety, health, and environmental protection standards and bears the CE marking.

### 3. Risk Assessment and Mitigation

Potential Hazards:

- Electrical Shock: Risk of electric shock if the product is improperly handled or damaged.
- Overheating: Overheating may occur if the product is overloaded or improperly ventilated.
- EMI Interference: Risk of ineffective EMI suppression if product is misused.
- Surge Damage: Potential damage to connected devices if surge protection is compromised.

Mitigation Measures:

- Equipped with Non-Intrusive Filtering (NIF) to reduce RFI noise without affecting audio dynamics.
- Integrated three-way surge protection (Live-Earth, Neutral-Earth, Live-Neutral) to safeguard against power surges and lightning strikes.
- Clear usage instructions provided to avoid overloading and ensure proper ventilation.
- Tested in compliance with EN standards to ensure effective EMI suppression.

### 4. Technical Specifications

- Input Voltage: 110-250V
- Frequency Range: 50-60Hz
- Max Load: 2300W (10A versions); 3680W (16A versions)
- Surge Protection: Three-way protection (Live-Earth, Neutral-Earth, Live-Neutral)

- RFI Noise Damping: Up to 40dB
- Chassis: Shielded aluminum to prevent electric, electromagnetic, and magnetic fields

## 5. Labeling and Traceability

Each product is labeled with:

- Product Name
- Serial/Batch Number
- Manufacturer Contact Information
- CE Marking

## 6. Instructions for Safe Use

- Only use the product within specified voltage and frequency limits.
- Ensure proper ventilation to avoid overheating.
- Avoid exposure to moisture or direct sunlight.
- Disconnect from mains during installation or maintenance.

## 7. Incident Management and Reporting

Post-Market Surveillance:

- Supra Cables monitors product performance and user feedback to identify potential safety issues.

Incident Reporting:

- In case of a safety issue, customers are encouraged to contact Supra Cables immediately.
- Incidents will be reported to relevant authorities via the EU Safety Business Gateway as required by GPSR.


## 8. Declaration of Conformity

Supra Cables declares that this product complies with the following directives and standards:

- CE, RoHS, REACH, EAC, WEEE & Verified by Intertek Sweden
- EN 50085-2-4:2009 in conjunction with EN 50085-1:2005

## 9. Disposal Instructions

- Dispose of this product in accordance with local electronic waste disposal regulations.
- Do not discard with general household waste.

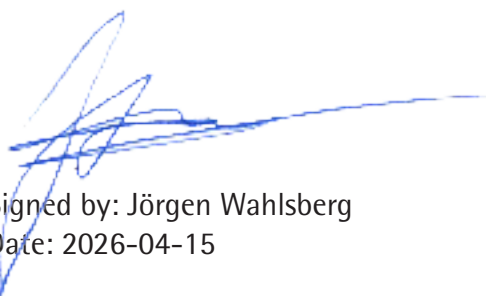

Signed by: Jörgen Wahlsberg  
Date: 2026-04-15

