

## SUPRA PLY 2X2.0

Loudspeaker Cable



Gauge: 2x2.0mm<sup>2</sup> / AWG 14

Rev. date: 2026-05-08

Customs tariff no: 8544499390

Country of origin: Sweden

- Extremely low inductance
- Tin plated to minimize electron jumps between lead strands
- Dynamic sound - a multi test winner
- Made in Sweden

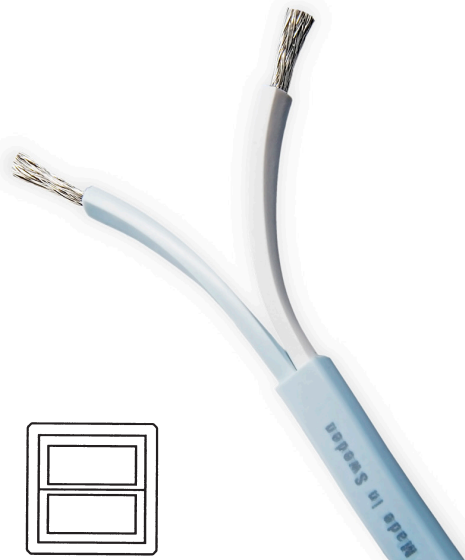

### Ply 2x2.0 - a multi test winner

SUPRA Ply 2x2.0 uses a flat, tightly arranged conductor geometry designed to optimize electrical performance for loudspeaker applications. The construction is engineered to achieve low inductance, helping preserve transient response and high-frequency clarity in audio signal transmission. The closely coupled conductor layout results in controlled capacitance, while the overall design prioritizes reduced inductance, which is typically more critical in speaker-level applications for maintaining accurate sound reproduction. Tin-plated copper strands are used to improve long-term stability and reduce oxidation, supporting consistent electrical performance over time.

Overall, Ply 2x2.0 is designed to provide a stable, low-loss signal path with controlled electrical properties for high-quality HiFi sound reproduction.

### CONSTRUCTION

|                       |   |
|-----------------------|---|
| Conductor (x2):       | Tin plated OFC-braid 24x5x0.15 mm             |
| Diameter:             | 3.9x1.2 mm                                    |
| Cross section Area:   | 2x2.0mm <sup>2</sup> / AWG 14                 |
| Insulation:           | PVC GA78, square-model. Blue + / White -      |
| Insulation thickness: | 0.8 mm  |
| External size:        | 5.8x5.8 mm. Jacket Iceblue PVC GA78           |
| Colour:               | Ice Blue & white (other colours upon request) |
| Markning:             | SUPRA PLY 2x2.0 + Made in Sweden + Meter mark |
| Weight:               | 74 kg/km                                      |
| Packing:              | Bobbin 100m (other lengths upon request)      |



### ELECTRICAL SPECIFICATION

|                |            |
|----------------|------------|
| Resistance:    | 8.1 ohm/km |
| Inductance:    | 0.30 uH/m  |
| Rated voltage: | 100V       |



| PRODUCT              | Qty  | Part.no    | EAN-13        | E-no    | Carton |
|----------------------|------|------------|---------------|---------|--------|
| PLY 2X2.0 BLUE B100  | 100M | 1000000172 | 7330060000041 | 4866473 |        |
| PLY 2X2.0 BLUE 5M    | 1PC  | 1000000487 | 7330060201912 |         | 25PCS  |
| PLY 2X2.0 BLUE 10M   | 1PC  | 1000000495 | 7330060201929 |         | 13PCS  |
| PLY 2X2.0 BLUE 20M   | 1PC  | 1000000560 | 7330060202629 |         | 13PCS  |
| PLY 2X2.0 WHITE B100 | 100M | 1000000834 | 7330060204616 |         |        |
| PLY 2X2.0 WHITE 10M  | 1PC  | 1000000842 | 7330060204623 |         | 13PCS  |
| PLY 2X2.0 WHITE 20M  | 1PC  | 1000000859 | 7330060204630 |         | 13PCS  |
| PLY 2X2.0 WHITE 5M   | 1PC  | 1000000875 | 7330060204654 |         | 25PCS  |